

REC'D 13 DEC 2004

WIPO

PCT

PA 1122137

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 03, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/529,597


FILING DATE: December 15, 2003

IB/04/52741

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**



P. Swain

P. SWAIN

Certifying Officer

13049 U.S. PTO
121503

Please type a plus sign (+) inside this box



PTO/SB/16 (02-01)
Approved for use through 10/31/2002. OMB 0551-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV312068652 US Date of Deposit: DECEMBER 15, 2003

INVENTOR(S)				
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)		
RONALD C.	LILLEY	35615 6 TH AVE. SW, FEDERAL WAY, WA, 98023, US		
SCOTT E.	HALL	23505 SE 137 TH ST., LISSAQUAH, WA, 98027, US		
JOHN W.	PACE	4715 175 TH ST., BOTHELL, WA, 98012, US		
WILLIAM E.	BRYANT	13530 432 ND AVE. SE, NORTH BEND, WA, 98045, US		
JOSEPH W.	GREZ	10404 428 AVE. SE, NORTH BEND, WA, 98045, US		
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto				
TITLE OF THE INVENTION (280 characters max)				
SYSTEM FOR CHANGING THE AMPLITUDE OF MOVEMENT FOR A POWER TOOTHBRUSH BRUSHHEAD BY CHANGING THE DRIVE FREQUENCY OF THE TOOTHBRUSH				
CORRESPONDENCE ADDRESS				
Direct all correspondence to:		<div style="border: 1px solid black; padding: 5px; text-align: center;"> *24737* <small>US PATENT AND TRADEMARK OFFICE</small> </div>		
<input checked="" type="checkbox"/> Customer Number <u>24737</u>				
OR		Type Customer Number here		
<input type="checkbox"/> Firm or Individual Name				
Address				
City	State	ZIP		
Country	Telephone	Fax		
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification Number of Pages <u>8</u>		<input type="checkbox"/> CD(s), Number <u> </u>		
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets <u>5</u>		<input type="checkbox"/> Other (specify) <u> </u>		
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)				
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: <u>14-1270</u>		FILING FEE \$AMOUNT 160.00		
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
<input checked="" type="checkbox"/> No. <input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted, *Ernestine C. Bartlett* Date 15 DECEMBER 2003
SIGNATURE
TYPED or PRINTED NAME ERNESTINE C. BARTLETT REGISTRATION NO.: 22,861
(if appropriate)
TELEPHONE (914) 333-9640 Docket Number: US030503

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Alexandria, VA 22313-1450.

SYSTEM FOR CHANGING THE AMPLITUDE OF MOVEMENT FOR A POWER TOOTHBRUSH BRUSHHEAD BY CHANGING THE DRIVE FREQUENCY OF THE TOOTHBRUSH

Technical Field

5 This invention relates generally to power toothbrushes, and more specifically concerns such a toothbrush which is driven in a manner to produce a periodic change or variation in amplitude of a brushhead portion (which includes the bristles and bristle plate) of the toothbrush during operation thereof.

Background of the Invention

10 In power toothbrushes, there is usually a correlation between the amplitude of brushhead movement as it oscillates, relative to both cleaning effectiveness and sensory experience. Greater amplitude provides better cleaning results. However, there is a practical upper limit to the amplitude, above which discomfort occurs to the average user, although there is uncertainty as to the particular characteristics of the amplitude which are
15 responsible for the discomfort. In the present invention, the amplitude is varied in a particular manner, allowing a user to tolerate more amplitude, which increases the sensory brushing experience and improves the cleansing effect of the toothbrush as well.

Summary of the Invention

Accordingly, the present invention is a system for resonantly driving a power
20 toothbrush having a resonant frequency, wherein a brushhead portion of the toothbrush moves in operation through a path with an amplitude about a center point, comprising: a resonant drive system for driving a brushhead at a drive frequency, the drive system including a circuit for changing the drive frequency relative to the center frequency to produce a periodic change of amplitude of the brushhead portion within the range of 5-
25 30%, providing an improved sensory experience without discomfort to the user.

Brief Description of the Drawings

Figure 1 is a diagram of brushhead voltage (energy) against frequency for a power toothbrush having a known resonant frequency at approximately 259 Hz.

Figure 2 is a block diagram of one embodiment of the toothbrush drive system of
30 the present invention.

Figure 3 is a diagram of brushhead voltage (energy) against frequency using the system of Figure 2.

Figures 4 and 5 show diagrams of change (variation) of amplitude and peak amplitude against brushhead resonant frequency for a power toothbrush driven at 259 Hz.

Figures 6 and 7 show diagrams of change (variation) in amplitude against brushhead resonant frequency for a frequency modulated drive signal with different modulation rate (Figure 6) and different maximum frequency deviations of the modulation (Figure 7).

Figure 8 is a block diagram of another embodiment of the present invention.

Figures 9 and 10 are diagrams of variations in amplitude of the brush portion of the toothbrush against time and variation in drive frequency against time, respectively.

10 Best Mode for Carrying Out the Invention

Typically, power toothbrushes having a brushhead portion designed to oscillate about a center position are driven at a preselected frequency, referred to herein as a center frequency F_C . The center frequency is determined by the designer of the drive system and may be selected to be at or near the resonant frequency of the toothbrush to provide maximum efficiency relative to power consumed by the toothbrush during operation.

An example of such a toothbrush, using an electromagnetic drive system, is shown in U.S. Patent No. 5,189,751, which is owned by the assignee of present invention, the contents of which are hereby incorporated by reference. However, it should be understood that the present invention is not limited to a particular drive system, such as that shown in the '751 patent. Many other drive systems which produce an oscillating brushhead action are well known and can be used with the present invention.

Typically, a resonant drive toothbrush will operate slightly off resonance, since at resonance the amplitude of brushhead movement is quite high, resulting in significant discomfort to the average user. When the toothbrush is operated slightly off resonance, by 3 or 4 Hz, for instance, either above or below the resonant frequency, efficient cleaning results are obtained without discomfort to the user. Figure 1 shows a plot of brushhead voltage (energy) against frequency for a resonant drive toothbrush. Note that the plot line 12 has one large peak at region 14, in the vicinity of the resonant frequency of the toothbrush.

As indicated above, it is known that amplitude of the toothbrush brushhead movement during its oscillation is a major factor in cleaning of the teeth, as well as providing the desired sensory effect of cleaning produced by action of the toothbrush. The

sensory effect is quite important, as it provides the user an experience which indicates that an effective cleaning of the teeth and treatment of the gums has in fact occurred. Increasing amplitude thus would appear to be desirable, to increase cleaning and sensory effect, but as indicated above, increasing amplitude beyond a particular point will result in significant discomfort to the average user.

5 In the present invention, the drive frequency is changed periodically, about F_C , such as by frequency modulation, to produce a periodic change (Δ) in motion (amplitude) of the brushhead, producing in effect an amplitude (motion) modulation, which results in an increase in average amplitude of brush movement. This produces an improved sensory
10 brushing experience for the user, as well as a possible improvement in cleaning effect, without discomfort to the user.

In the present invention, with a resonant drive toothbrush, the center frequency F_C is first moved closer to the resonant frequency of the toothbrush, typically closer than would be done otherwise (because of resulting discomfort). The closeness of the center
15 frequency to the resonant frequency has a significant effect on the resulting change of amplitude of brush movement due to frequency modulation. In the embodiment shown, for instance, for a toothbrush resonant frequency of 256.5, the center frequency is 259 Hz.

As the center frequency approaches the resonant frequency, the peak amplitude approaches its highest point, while the change or variation in Δ amplitude approaches a
20 minimum. This is shown graphically in Figures 4 and 5, with plots of peak amplitude (20) and change in amplitude (21) against resonant frequency for a toothbrush driven at a frequency of 259 Hz with frequency modulation. Factors in the drive signal which affect the amplitude change of the brushhead include the frequency deviation (D) about F_C , *i.e.* the plus and minus variation of the drive frequency relative to the center frequency, the
25 modulation frequency (F_M), the wave shape (all illustrated in Figure 10 (which is a plot of frequency against time) and the duty factor.

The combination of the above frequency modulation factors (in particular the modulation frequency (F_m), the frequency deviation (D) and the wave shape must maintain the change of amplitude within a range of 5-30%. A change (variation) in amplitude is
30 illustrated in Figure 9, which is a plot of brushhead amplitude variation against time for a frequency modulated drive signal about F_C . Below 5% there is effectively no change in the sensory brushing experience or cleaning, while above 30% there is significant discomfort

to the average user. Preferably, the change is not greater than 20%, and most preferably is 10%.

The wave shape refers to the manner in which the drive frequency is changed, *i.e.* changing the drive frequency in one step is a square wave modulation signal, while
5 changing the frequency in a series of smaller steps over time to reach the maximum deviation is a triangular wave modulation signal, such as shown in Figure 10.

As indicated above, the peak amplitude of brushhead motion is the greatest when F_C is at the resonant frequency, while change (variation) in amplitude is at a minimum when F_C is at the resonant frequency. Hence, as indicated above, to obtain a periodic
10 change of amplitude, which is the thrust of the present invention, the center frequency must be some amount away from the resonant frequency of the device, in the present embodiment, approximately 3 Hz.

While the factors discussed herein influencing change of amplitude for frequency modulation of the drive signal are based on a resonant drive system, it is quite possible that
15 another type of modulation of the drive signal, resulting in a periodic change of amplitude, will also enhance cleaning effects and/or the sensory/brushing experience of cleaning in non-resonant systems as well. However, the explanation herein is based on a resonant drive system.

The effects of different modulation frequencies (rates) and different frequency deviations (D) are shown in the graphs of Figures 6 and 7. Both of these graphs plot
20 change of amplitude (Δ amplitude) versus brushhead resonant frequency for a toothbrush with a center frequency F_C of 259 Hz. Figure 6 shows that an increase in modulation frequency results in a significant decrease in change of brush amplitude (Δ amplitude), while Figure 7 shows that an increase in frequency deviation results in an increase in
25 change of brush amplitude (Δ amplitude) for a selected frequency difference between resonant frequency and center frequency (see for instance a resonant frequency of 256.5 with the center frequency of 259 Hz).

More particularly, from Figure 6, for a given center frequency F_C , the modulation frequency has a strong inverse effect on amplitude modulation. For instance, in an
30 embodiment where the center frequency is 259 Hz, relative to a resonant frequency of 256.5 Hz, a 12 Hz modulation frequency produces a change of amplitude within a particular range, depending upon the other factors of frequency deviation, wave shape and

duty factor. Increasing the modulation frequency from 12 Hz to 24 Hz reduces the change (variation) in amplitude or ΔA substantially, and further increasing the modulation frequency to 40 Hz brings the amplitude variation close to zero.

More particularly, from Figure 7, deviation (D), the change in frequency relative to the center frequency F_C , has a direct effect on the amplitude modulation. For instance, in the embodiment shown, the preferred deviation is ± 3.5 Hz. Doubling the deviation approximately doubles the change (variation) of amplitude.

Other factors influencing to some extent change of amplitude, as indicated above, include the wave shape of the modulation signal and the duty factor of the modulating frequency. The use of a triangle wave shape for the change in modulating frequency as opposed to a square wave shape, has approximately half the effect on change of amplitude (ΔA). With respect to the duty factor, the change in amplitude increases when the duty factor is reduced.

The preferred embodiment, for an amplitude change (ΔA) around 10%, has a resonant frequency of 262 Hz, a center frequency F_C of 259 Hz, a modulation frequency F_M of 12 Hz and a frequency deviation (D) of 3.5 Hz. The wave shape is triangular and the duty factor 48%. With such a system, an increase in sensory experience occurs, as well as improved cleaning, without discomfort. Figure 3 shows the distribution of energy relative to frequency for such an arrangement, specifically the drive signal's frequency spectrum.

Figure 2 is a block diagram showing the structural implementation of the system described above. A center frequency F_C is produced by a circuit, block 30. The center frequency is applied to a frequency source circuit 32, to which is also supplied the frequency modulation signal F_M by block 34. The frequency generated by the frequency source 32 is applied to the drive electronics of the toothbrush, as represented by block 36, which is in turn driven by a power source 38, such as a battery.

In one embodiment, the drive electronics 36 drives a magnetic drive coil 40, the action of which is coupled by a magnetic coupling arrangement 41 to a mechanical resonant system 42, which in turn drives the brush 44 in an oscillating manner.

In the arrangement above, the change of drive frequency about the center frequency F_C is accomplished by conventional frequency modulation means, which are well known, in which the drive frequency is changed at a selected rate. However, the change of frequency could be accomplished by another arrangement. This arrangement is shown in

Figure 8. Two simultaneously generated drive signals are combined together, with the resulting signal driving the brushhead. A first frequency signal is generated by frequency generator 60, while a second frequency signal is generated by frequency generator 62. Typically, one signal will be at the resonant frequency of the device, while the other signal
5 will be a frequency somewhat removed from the resonant frequency. In one case, for a resonant frequency of 262 Hz (the first frequency), the second frequency could be 242 Hz. Generally, the difference will be in the range of 5-30 Hz.

The two signals are then applied to an op-amp 64, where they are combined. The output of the op-amp 64 is a combined signal, the result of the two signals being "beat",
10 which produces a change in brushhead amplitude. The output is filtered to remove high frequencies. The remainder of the drive circuit shown in Figure 8 is similar to that of Figure 2.

Again, however, there are limitations relative to the range of change of amplitude over time, *i.e.* amplitude modulation, because of user discomfort. The selection of the
15 frequencies of the two signals is thus an important factor relative to achieving the desired results.

As mentioned above, the first embodiment, using frequency modulation, is described above in a resonant drive system, as is the other embodiment, with one of the two signals being at the resonant frequency.

20 Hence, a system has been disclosed for producing a change in amplitude, in effect an amplitude modulation, of the brushhead movement by frequency modulating the drive signal. The amplitude modulation results in an improved sensory experience for the user and improved cleaning effect without discomfort.

Although a preferred embodiment of the invention has been disclosed for purposes of illustration, it should be understood that various changes, modifications and substitutions may be incorporated in the embodiment without departing from the spirit of the invention which is defined by the claims as follows:

CLAIMS:

1. A system for resonantly driving a power toothbrush having a resonant frequency, wherein a brushhead portion of the toothbrush moves in operation through a path with an amplitude about a center point, comprising:
a resonant drive system for driving a brushhead at a drive frequency, the drive system including a circuit for changing the drive frequency relative to the center frequency to produce a periodic change of amplitude of the brushhead portion within the range of 5-30%, providing an improved sensory experience without discomfort to the user.
2. The system of claim 1, wherein the change of amplitude is less than 20%.
3. The system of claim 1, wherein the center frequency is different from the resonant frequency of the toothbrush within a range of 0 to 5 Hz.
4. The system of claim 3, wherein the changing of the drive frequency is accomplished by frequency modulation.
5. The system of claim 4, wherein the difference between the center frequency and the resonant frequency is approximately ± 3 Hz.
6. A system of claim 1, wherein the driving frequency has a frequency deviation with a range of 1-14 Hz from the center frequency.
7. The system of claim 6, wherein the frequency deviation is approximately 3.5 Hz.
8. The system of claim 1, wherein the driving frequency change has a modulation frequency within the range of 3-40 Hz.
9. The system of claim 8, wherein the modulation frequency is approximately 12 Hz.
10. The system of claim 4, wherein the change of the drive frequency is in the form of a triangular wave.
11. The system of claim 1, wherein the change of drive frequency has a duty factor of approximately 48%.
12. The system of claim 1, wherein the drive system includes two driving signal sources, one signal source being at approximately the resonant frequency and the other signal source being at a frequency which is slightly different than the resonant frequency.
13. The system of claim 12, wherein the frequency of the second signal source is different than the frequency of the first source within a range of 5 to 30 Hz.

ABSTRACT

The drive system drives a brushhead at a driving frequency. The drive system includes a frequency modulation system which changes the driving frequency about a center frequency in such a manner, with selected frequency deviation and modulation
5 frequency, which interacts with the resonance of the brushhead to produce a change of amplitude in the movement of the brushhead within a range of 5-30%.

FIG 1

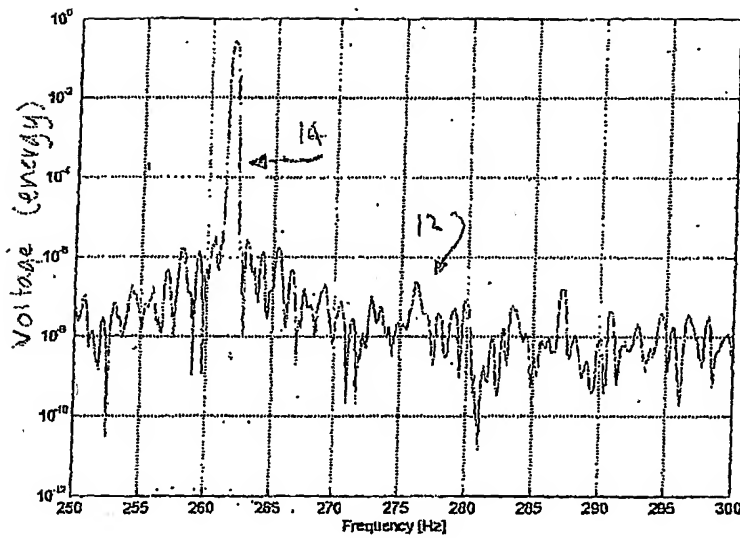


FIG 2

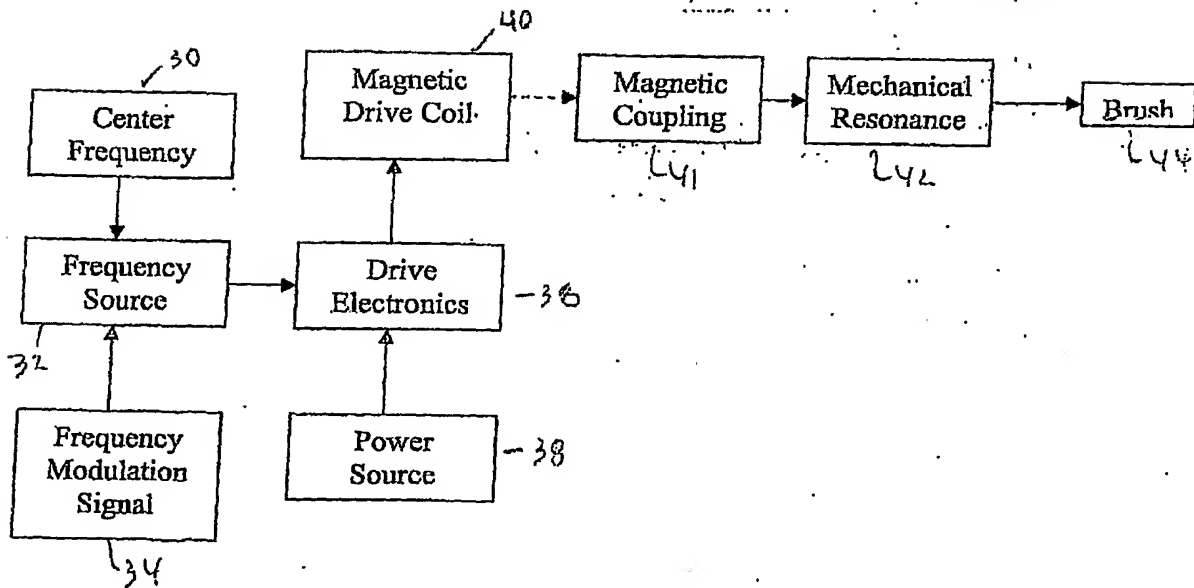


FIG 3

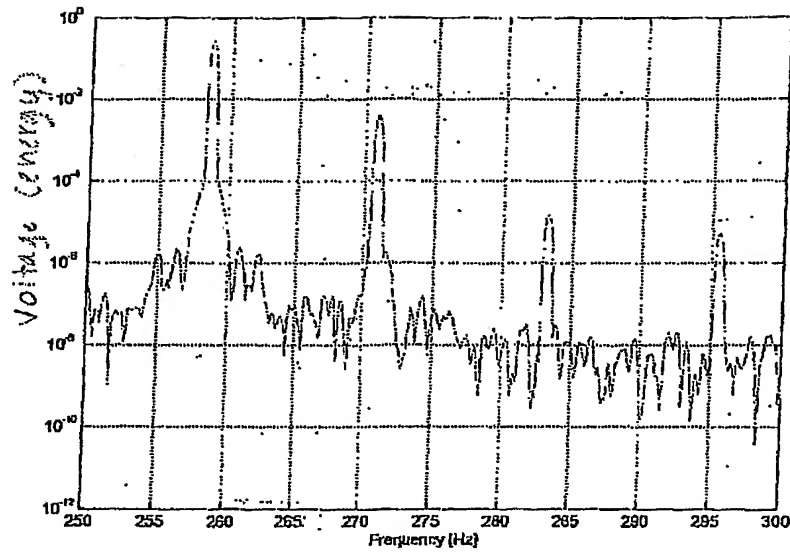


FIG 8

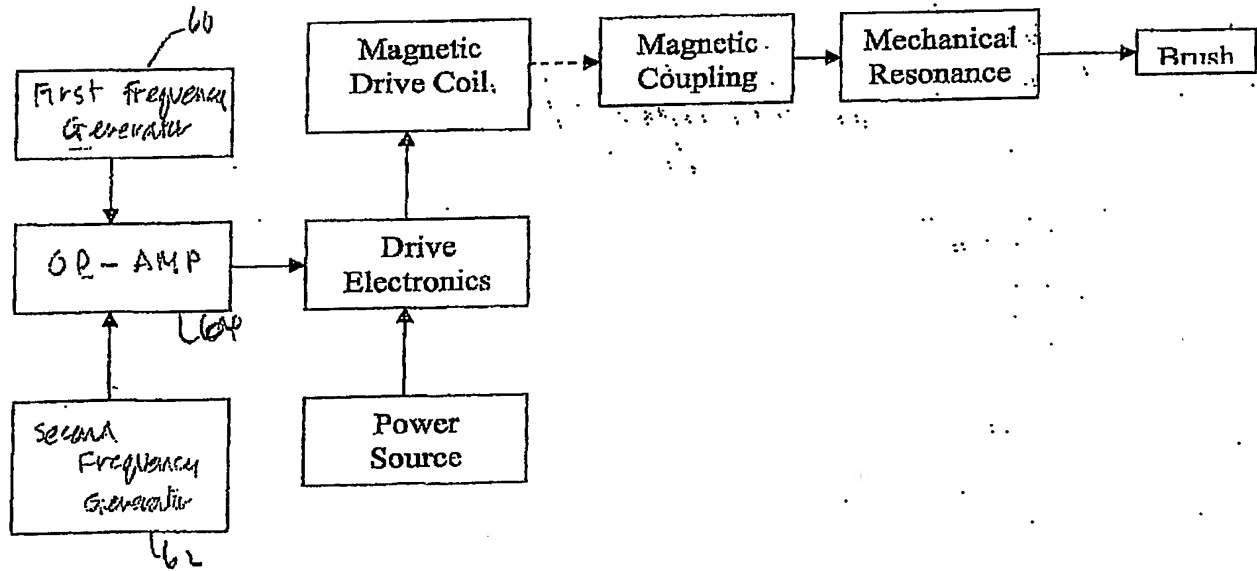


FIG 4

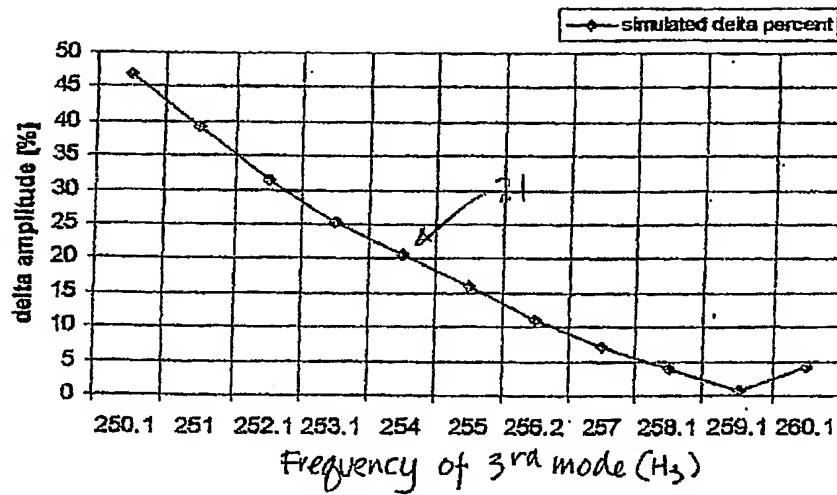


FIG 5

